MAR 11 1987 594-C-32 FEM 1.209:361310

COMPLETED 15

FLOOD INSURANCE STUDY

ORIGINAL

TOWN OF CHAZY, NEW YORK
CLINTON COUNTY

MAY 19, 1987

Federal Emergency Management Agency

COMMUNITY NUMBER - 361310

BEST COPY AVAILABLE

NOTICE TO
FLOOD INSURANCE STUDY USERS

Communities participating in the National Flood Insurance Program (NFIP) have established repositories of flood hazard data for floodplain management and flood insurance purposes. This Flood Insurance Study (FIS) may not contain all data available within the repository. It is advisable to contact the community repository for any additional data.

BEST COPY AVAILABLE

TABLE OF CONTENTS

		Page
1.0	INTRODUCTION	1
	1.1 Purpose of Study	1
	1.2 Authority and Acknowledgments	1
	1.3 Coordination	1
2.0	AREA STUDIED	2
	2.1 Scope of Study	2
	2.2 Community Description	2
	2.3 Principal Flood Problems	2
	2.4 Flood Protection Measures	4
3.0	ENGINEERING METHODS	4
	3.1 Hydrologic and Hydraulic Analyses	5
4.0	FLOOD PLAIN MANAGEMENT APPLICATIONS	6
	4.1 Flood Plain Boundaries	6
	4.2 Floodways	6
5.0	INSURANCE APPLICATION	7
6.0	FLOOD INSURANCE RATE MAP	8
7.0	OTHER STUDIES	9
8.0	LOCATION OF DATA	9

BEST COPY AVAILABLE

TABLE OF CONTENTS - continued

	Page
9.0 BIBLIOGRAPHY AND REFERENCES	9

FIGURES

Figure 1 - Vicinity Map	3

TABLES

Table 1 - Summary of Stillwater Elevations	5

EXHIBITS

Exhibit 1 - Flood Insurance Rate Map Index and Street Index
Flood Insurance Rate Map

BEST COPY AVAILABLE

FLOOD INSURANCE STUDY
TOWN OF CHAZY, CLINTON COUNTY, NEW YORK

1.0 INTRODUCTION

1.1 Purpose of Study

This Flood Insurance Study investigates the existence and severity of flood hazards in the Town of Chazy, Clinton County, New York, and aids in the administration of the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973. This study has developed flood risk data for various areas of the community that will be used to establish actuarial flood insurance rates and assist the community in its efforts to promote sound flood plain management. Minimum flood plain management requirements for participation in the National Flood Insurance Program (NFIP) are set forth in the Code of Federal Regulations at 44 CFR, 60.3.

In some states or communities, flood plain management criteria or requlations may exist that are more restrictive or comprehensive than the minimum Federal requirements. In such cases, the more restrictive criteria take precedence and the state (or other jurisdictional agency) will be able to explain them.

1.2 Authority and Acknowledgments

The sources of authority for this Flood Insurance Study are the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973.

The hydrologic and hydraulic analyses for the Lake Champlain portion of this study were taken from the Flood Insurance Study for Town of Plattsburgh, prepared by Camp Dresser & McKee, Environmental Engineers, for the Federal Emergency Management Agency (FEMA), under Contract No. H-3832.

1.3 Coordination

A search for basic data relating to flooding in the Town of Chazy was made at all levels of government. During the course of the work, contact was made with town officials, the Clinton County Planning and Highway Department, and the New York State Department of Environmental Conservation. On June 9, 1986, a final Consultation and Coordination Officer's (CCO) meeting, attended by representatives of FEMA, the town, and the State of New York, was held to review the results of the study.

BEST COPY AVAILABLE

2.0 AREA STUDIED

2.1 Scope of Study

This Flood Insurance Study covers the incorporated area of the Town of Chazy, Clinton County, New York. The area of study is shown on the Vicinity Map (Figure 1).

Lake Champlain was studied by detailed methods for its entire shoreline within the community; this study was based on a lake level frequency analysis done in 1976. The areas studied by detailed methods were selected with priority given to all known flood hazard areas and areas of projected development and proposed construction.

Corbeau Creek, Tracy Brook, the Little Chazy River, Boyington Brook, Farrell Brook, Lake Alice, and several unnamed tributaries and marsh areas were studied by approximate methods. Approximate analyses were used to study those areas having a low development potential or minimal flood hazards. The scope and methods of study were proposed to, and agreed upon by, FEMA and the Town of Chazy.

2.2 Community Description

The Town of Chazy is located in northeastern New York, approximately 10 miles south of the Canadian border. It is bordered by the Towns of Champlain and Mooers to the north, the Town of Altona to the west, the Town of Beekmantown to the south, and Lake Champlain to the east.

Lake Champlain is a glacial lake with a north-south orientation, forming the border between New York and Vermont. Its total length is over 100 miles. At its widest part, approximately 10 miles south of Chazy, the lake is over 22 miles wide. At the Canadian border, where the lake empties into the Richelieu River, its drainage area is 8,277 miles.

2.3 Principal Flood Problems

High-water levels on Lake Champlain result from a complex combination of climatic conditions that characterize the winter period throughout its drainage area. The conditions most conducive to flooding along the lake shore are freezing temperatures and a large quantity of snowfall throughout the winter, followed by a sudden period of warm and rainy weather without a refreeze. Such a combination has occurred in varying intensities in the past and has resulted in flood damages along the shore. To aggravate this flooding, the ice sheet on the lake's surface has been so thick at times that it did not readily melt with the onset of warm weather. The result has been that the large volume of water in the lake has lifted the ice, and strong winds have forced it ashore, crushing

BEST COPY AVAILABLE

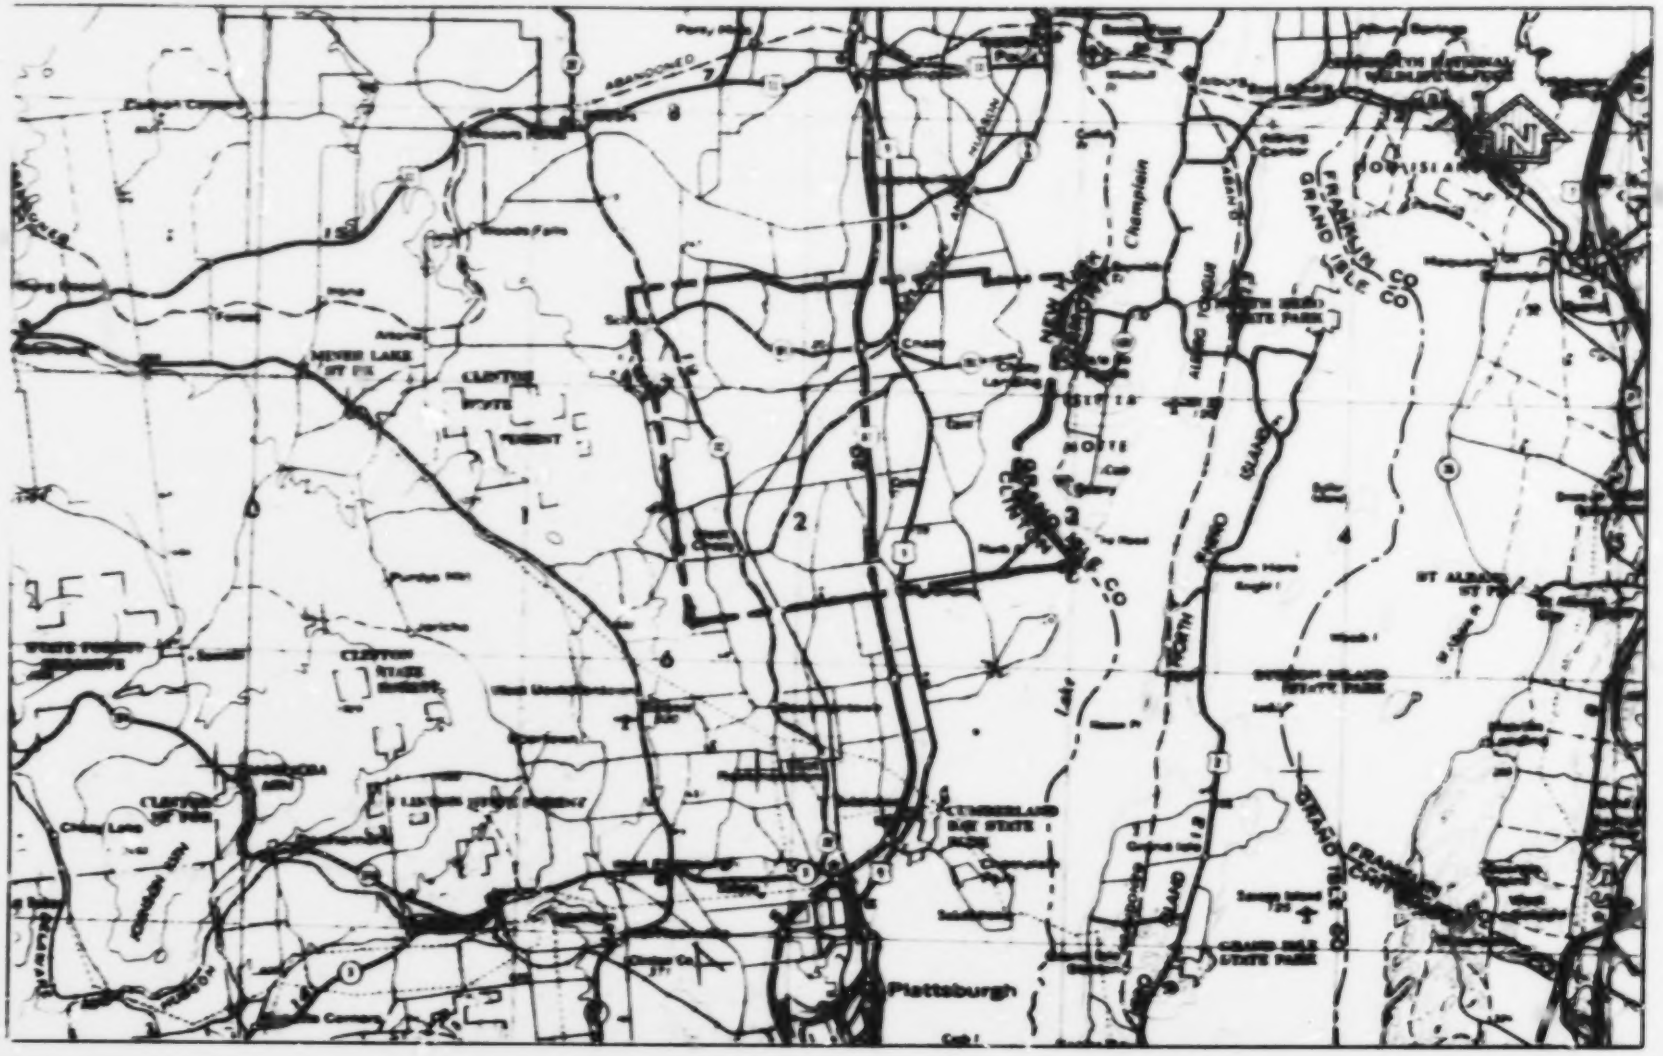

FIGURE 1

FEDERAL EMERGENCY MANAGEMENT AGENCY

TOWN OF CHAZY, NY
(CLINTON CO.)

APPROXIMATE SCALE

4 0 4 8 12 MILES

VICINITY MAP

BEST COPY AVAILABLE

lake front structures in its path. It is estimated that ice can exert a force of up to 30,000 pounds per square inch, enough to pulverize a concrete wall.

On May 4, 1869, Lake Champlain was at its highest level in the last 150 years at 102.1 feet. In April 1903, the lake stage reached an elevation of 101.8 feet. In March 1936 and April 1976, it reached elevations of 101.61 and 101.64 feet, respectively.

High-lake stage accompanied by wind-driven waves aggravates the flooding problem and increases the risk of property damage. Local residents have reported encountering waves as high as 8 feet on Lake Champlain and have seen 6-foot waves break against cliffs along the shore.

Gage information from U. S. Geological Survey (USGS) gage No. 04294500 at Burlington, Vermont, and USGS gage No. 04295000 at Rouses Point, New York, was utilized for this study.

2.4 Flood Protection Measures

No flood protection structures currently exist in the Town of Chazy.

3.0 ENGINEERING METHODS

For the flooding source studied in detail in the community, standard hydrologic and hydraulic study methods were used to determine the flood hazard data required for this study. Flood events of a magnitude which are expected to be equaled or exceeded once on the average during any 10-, 50-, 100-, or 500-year period (recurrence interval) have been selected as having special significance for flood plain management and for flood insurance rates. These events, commonly termed the 10-, 50-, 100-, and 500-year floods, have a 10, 2, 1, and 0.2 percent chance, respectively, of being equaled or exceeded during any year. Although the recurrence interval represents the long term <u>average</u> period between floods of a specific magnitude, rare floods could occur at short intervals or even within the same year. The risk of experiencing a rare flood increases when periods greater than 1 year are considered. For example, the risk of having a flood which equals or exceeds the 100-year flood (1 percent chance of annual exceedence) in any 50-year period is approximately 40 percent (4 in 10), and, for any 90-year period, the risk increases to approximately 60 percent (6 in 10). The analyses reported herein reflect flooding potentials based on conditions existing in the community at the time of completion of this study. Maps and flood elevations will be amended periodically to reflect future changes.

BEST COPY AVAILABLE

3.1 Hydrologic and Hydraulic Analyses

Analyses were carried out to establish the peak elevation-frequency relationships for the flooding source studied in detail affecting the community.

The hydrologic information for Lake Champlain was taken from the Flood Insurance Study for the Town of Plattsburgh, which was completed in 1976 (Reference 1). The USGS measures lake stages at two gaging stations on the northern end of Lake Champlain: No. 04294500 at Burlington, Vermont; and No. 04295000 at Rouses Point, New York. The data from the Rouses Point gage were used for this analysis because it is located on the western shore of Lake Champlain, because its period of record (1871 to present) is longer than that of the Burlington gage, and because examination of the records of these gages shows that the lake stages at both locations are very similar.

Graphical frequency analysis was chosen as the method most likely to determine lake stages of the selected recurrence intervals with a reasonable degree of accuracy. The results of this analysis were plotted on an arithmetic-probability graph (rather than a logarithmic-probability graph), which allows data points to vary over a wider range. This flexibility would help to describe a stage-frequency curve more accurately and would reduce the human error introduced in fitting a curve through the plotted points. It was decided not to employ the log-Pearson Type III frequency analysis because the range of logarithms of the lake stage data is too narrow to yield reliable results.

Three graphical frequency analyses were applied to the data measured at the Chazy gage from 1871 to 1976. They were the Weibull and Hazen Formulas, and the Beard Method (References 2 and 3). The stages for Lake Champlain presented in this report were obtained from the stage-frequency curve produced by the Beard Method because this curve appears to be an average of the curves produced by the other two formulas.

All elevations are referenced to the National Geodetic Vertical Datum of 1929 (NGVD).

A summary of peak elevation-frequency relationships for Lake Champlain is given in Table 1, "Summary of Stillwater Elevations."

TABLE 1 - SUMMARY OF STILLWATER ELEVATIONS

FLOODING SOURCE AND LOCATION	ELEVATION (feet) 10-YEAR	50-YEAR	100-YEAR	500-YEAR
LAKE CHAMPLAIN				
At Chazy, New York	101.01	101.76	101.97	102.32

BEST COPY AVAILABLE

4.0 FLOOD PLAIN MANAGEMENT APPLICATIONS

The NFIP encourages State and local governments to adopt sound flood plain management programs. Therefore, each Flood Insurance Study provides 100-year flood elevations and delineations of the 100- and 500-year flood plain boundaries and 100-year floodway to assist communities in developing flood plain management measures.

4.1 Flood Plain Boundaries

To provide a national standard without regional discrimination, the 1 percent annual chance (100-year) flood has been adopted by FEMA as the base flood for flood plain management purposes. The 0.2 percent annual chance (500-year) flood is employed to indicate additional areas of flood risk in the community. For the flooding source studied in detail, the 100- and 500-year flood plain boundaries have been delineated using topographic maps at a scale of 1:24,000 with a contour interval of 10 feet (Reference 4).

For the flooding sources studied by approximate methods, the boundary of the 100-year flood was delineated using the Flood Hazard Boundary Map for the Town of Chazy (Reference 5).

The 100- and 500-year flood plain boundaries are shown on the Flood Insurance Rate Map (Exhibit 1). On this map, the 100-year flood plain boundary corresponds to the boundary of the areas of special flood hazards (Zones A and AE), and the 500-year flood plain boundary corresponds to the boundary of areas of moderate flood hazards. In cases where the 100- and 500-year flood plain boundaries are close together, only the 100-year flood plain boundary has been shown. Small areas within the flood plain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data.

For the streams studied by approximate methods, only the 100-year flood plain boundary is shown on the Flood Insurance Rate Map (Exhibit 1).

4.2 Floodways

The floodway is the channel of a stream, plus any adjacent flood plain areas, that must be kept free of encroachment so that the 100-year flood can be carried without substantial increases in flood heights.

The floodway concept is not applicable to lacustrine flooding; therefore, no floodways are shown in this study.

BEST COPY AVAILABLE

5.0 INSURANCE APPLICATION

For flood insurance rating purposes, flood insurance zone designations are assigned to a community based on the results of the engineering analyses. These zones are as follows:

Zone A

Zone A is the flood insurance rate zone that corresponds to the 100-year flood plains that are determined in the Flood Insurance Study by approximate methods. Because detailed hydraulic analyses are not performed for such areas, no base flood elevations or depths are shown within this zone.

Zone AE

Zone AE is the flood insurance rate zone that corresponds to the 100-year flood plains that are determined in the Flood Insurance Study by detailed methods. In most instances, whole-foot base flood elevations derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

Zone AH

Zone AH is the flood insurance rate zone that corresponds to the areas of 100-year shallow flooding (usually areas of ponding) where average depths are between 1 and 3 feet. Whole-foot base flood elevations derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

Zone AO

Zone AO is the flood insurance rate zone that corresponds to the areas of 100-year shallow flooding (usually sheet flow on sloping terrain) where average depths are between 1 and 3 feet. Average whole-foot depths derived from the detailed hydraulic analyses are shown within this zone.

Zone A99

Zone A99 is the flood insurance rate zone that corresponds to areas of the 100-year flood plain that will be protected by a Federal flood protection system where construction has reached specified statutory milestones. No base flood elevations or depths are shown within this zone.

BEST COPY AVAILABLE

Zone V

Zone V is the flood insurance rate zone that corresponds to the 100-year coastal flood plains that have additional hazards associated with storm waves. Because approximate hydraulic analyses are performed for such areas, no base flood elevations are shown within this zone.

Zone VE

Zone VE is the flood insurance rate zone that corresponds to the 100-year coastal flood plains that have additional hazards associated with storm waves. Whole-foot base flood elevations derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

Zone X

Zone X is the flood insurance rate zone that corresponds to areas outside the 500-year flood plain, areas within the 500-year flood plain, and to areas of 100-year flooding where average depths are less than 1 foot, areas of 100-year flooding where the contributing drainage area is less than 1 square mile, and areas protected from the 100-year flood by levees. No base flood elevations or depths are shown within this zone.

Zone D

Zone D is the flood insurance rate zone that corresponds to unstudied areas where flood hazards are undetermined, but possible.

6.0 FLOOD INSURANCE RATE MAP

The Flood Insurance Rate Map is designed for flood insurance and flood plain management applications.

For flood insurance applications, the map designates flood insurance rate zones as described in Section 5.0 and, in the 100-year flood plains that were studied by detailed methods, shows selected whole-foot base flood elevations or average depths. Insurance agents use the zones and base flood elevations in conjunction with information on structures and their contents to assign premium rates for flood insurance policies.

For flood plain management applications, the map shows by tints, screens, and symbols, the 100- and 500-year flood plains. Floodways and the locations of selected cross sections used in the hydraulic analyses and floodway computations are shown where applicable.

BEST COPY AVAILABLE

7.0 OTHER STUDIES

Information for this study was taken from the Flood Insurance Study for the Town of Plattsburgh, which also borders Lake Champlain (Reference 1). Flood Insurance Studies for the Towns of Champlain and Beekmantown are currently being prepared (References 6 and 7). The lake level information presented in those studies will be in exact agreement with this study.

In 1937, the International Joint Commission of the United States and Canada recommended the construction of a dam and levees at Fryers Island on the Richelieu River upstream of St. Jean, Quebec, to control perennial flooding experienced along the river in the spring (Reference 8). The dam was built but never put into operation because the levees were not built; therefore, flooding has continued. Increased development in the flood plain of the river, which consists of excellent soil for agriculture, has resulted in increased damages during spring floods.

Due to its more detailed nature, this study supersedes the Flood Hazard Boundary Map for the Town of Chazy (Reference 5).

8.0 LOCATION OF DATA

Information concerning the pertinent data used in preparation of this study can be obtained by contacting the Natural and Technological Hazards Division, FEMA, 26 Federal Plaza, Room 1351, New York, New York 10278.

9.0 BIBLIOGRAPHY AND REFERENCES

1. Federal Emergency Management Agency, Flood Insurance Study, Town of Plattsburgh, Clinton County, New York, Washington, D. C., September 28, 1979.

2. Ven Te Chow, ed., Handbook of Applied Hydrology, New York, McGraw-Hill, 1964.

3. Leo R. Beard, Statistical Methods in Hydrology, Sacramento, California, U. S. Army Corps of Engineers, January 1962.

4. U. S. Department of the Interior, Geological Survey, 7.5-Minute Series Topographic Maps, Scale 1:24,000, Contour Interval 10 Feet: Champlain, New York, 1966; Beekmantown, New York, 1966; West Chazy, New York, 1966; North Hero, Vermont-New York, 1966; Mooers, New York, 1966; and Rouses Point, New York, 1966.

BEST COPY AVAILABLE

5. U. S. Department of Housing and Urban Development, Federal Insurance Administration, Flood Hazard Boundary Map, Town of Chazy, Clinton County, New York, November 12, 1976.

6. Federal Emergency Management Agency, Flood Insurance Study, Town of Champlain, Clinton County, New York (Unpublished).

7. Federal Emergency Management Agency, Flood Insurance Study, Town of Beekmantown, Clinton County, New York (Unpublished).

8. The International Chazy-Richelieu Engineering Board, Regulation of Lake Champlain: Hydraulic Appendix, Volume II, Ottawa, Canada, February 1974.

BEST COPY AVAILABLE